



NEW
PRODUCT

BALLINA



4 COLORS

BONE

CHARCOAL

LIGHT GREY


SILVER PEARL

2 SURFACES


Matt

In/out


CHARCOAL 10 FACES

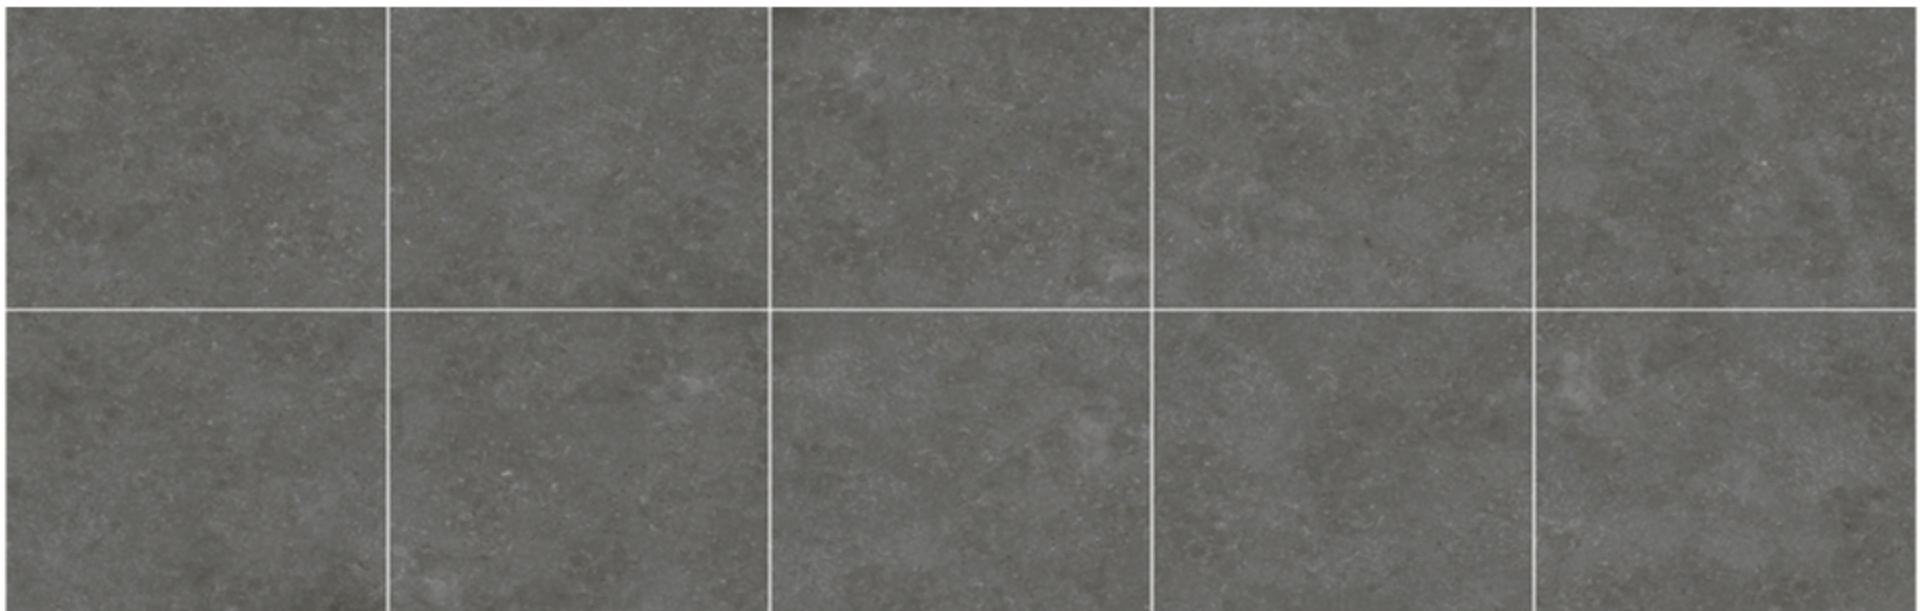

600X600MM

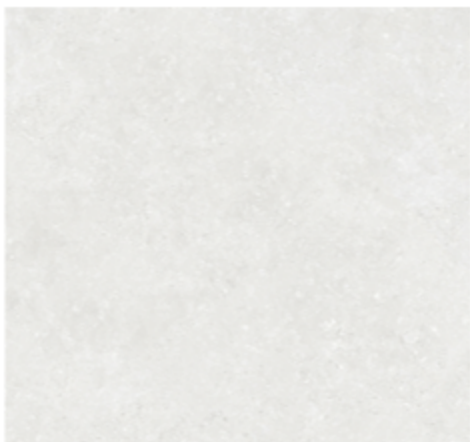

Sliver Pearl

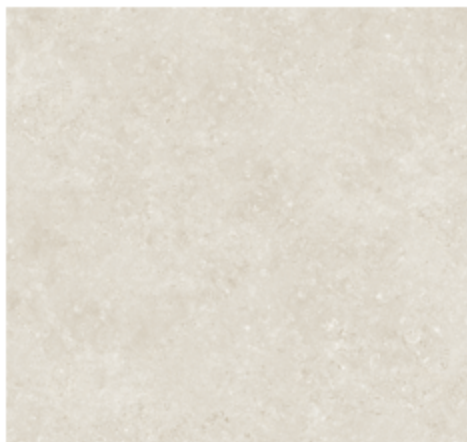

Bone



Light Grey



Charcoal



Sliver Pearl

600x1200mm

5 FACES



Charcoal


600x600mm



600X1200MM
5 FACES



600X1200MM
5 FACES

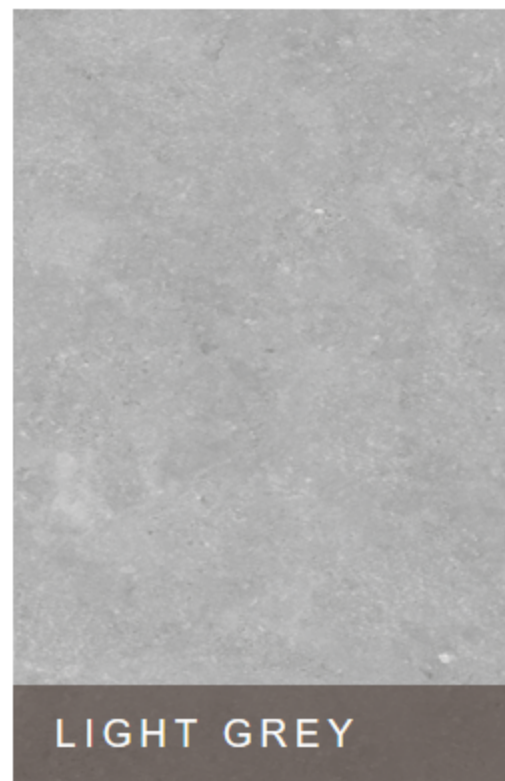

600X1200MM
5 FACES



600X1200MM
5 FACES



BALLINA-4 COLOURS

LIGHT GREY



BONE



CHARCOAL 600X600

BALLINA

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTICS	STANDARD TEST METHOD	STANDARD PRESCRIBED VALUES	CHARMAGRES VALUES
MEASUREMENT AND SURFACE APPEARANCE			
 LENGTH	EN ISO 10545-2	± 0.6%	± 0.1%
 WIDTH	EN ISO 10545-2	± 0.6%	± 0.1%
 THICKNESS	EN ISO 10545-2	± 5%	± 3%
 TRANSMUTATION	EN ISO 10545-2	± 0.5%	± 0.2%
PHYSICAL PROPERTIES			
 WATER ABSORPTION	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
 BREAKING STRENGTH	EN ISO 10545-4	≥ 1300N	≥ 1300N
 MODULUS OF RUPTURE	EN ISO 10545-4	≥ 35N/mm ²	≥ 35N/mm ²
 RESISTANCE TO ABRASION	EN ISO 10545-6	≤ 205mm ³	≤ 160mm ³
 THERMAL EXPANS COEFFICIENT	EN ISO 10545-8	≤ 9MK-1	≤ 7MK-1
 TEMPERATURE SHOCK RESISTANCE	EN ISO 10545-9	NO DEFECTS SHOULD BE VISIBLE	DURABLE
 FROST RESISTANCE	EN ISO 10545-12	NO SURFACE DEFECTS OR CRACKS SHOULD BE VISIBLE	ANTI-ICE
 SLIP RESISTANCE	DIN 51130	R9-R13	≥ R9
CHEMICAL PROPERTIES			
 CHEMICAL RESISTANCE PESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS	EN ISO 10545-13	THERE SHOULD BE NO VISIBLE CHANGES WHEN SUBJECTED TO CHEMICALS	DURABLE
 RESISTANCE TO STAINING	EN ISO 10545-14 when subjected to chemicals	THERE SHOULD BE NO VISIBLE CHANGES WHEN SUBJECTED TO CHEMICALS	NO VISIBLE DEFECTS

PACKING PARAMETER

SIZE	PCS / BOX	KG / BOX	M2 / BOX	BOX / PALLET	M2 / PALLET	KG / PALLET
30x60cm 12"x24"	8	30	1.44	40	57.6	1024
60x60cm 24"x24"	4	30	1.44	40	57.6	1024
60x120cm 24"x48"	2	35	1.44	30	43.2	1050

SIZES

600x1200mm	600x600mm	300x600mm
------------	-----------	-----------

FINISHED

MATT	IN/OUT
------	--------

