

FEZ



WOW



unexpected surfaces

FEZ

01. INTRO	<i>pag. 3</i>
02. SIZES, COLOURS AND FINISHES	<i>pag. 4</i>
03. RECOMMENDATIONS	
04. TECHNICAL FEATURES	<i>pag. 36</i>
05. TECHNICAL DRAWINGS	<i>pag. 37</i>
06. PACKING	<i>pag. 38</i>
	<i>pag. 39</i>

Curtsey to the Imperial Moroccan city of **Fez** and its worldwide famous craft skills, considered as an alive cultural treasure.

Designed with a traditional approach, that combines beauty and practicality, they are suitable for any neat environment.

How to choose between the range of suggestive colours? glossy translucent finishes, soft mats, metallics in steel and copper sized 6.2x12,5cm (2.5"x5")
Twenty delightful alternatives full of life.

New contours into a perfect balance.

FEZ
2.5"x5" / 6,2x12,5 cm



Mint Gloss



Emerald Gloss



Aqua Gloss



Ocean Gloss



Mustard Gloss



White Gloss



Warm Gloss



Grey Gloss



Graphite Gloss



Mint Matt



Emerald Matt




Aqua Matt



Ocean Matt



Mustard Matt



White Matt



Warm Matt




Grey Matt



Graphite Matt



Copper Gloss



Steel Gloss

Different colour shades randomly mixed within the box.
Diferentes tonalidades encajadas aleatoriamente.





Fez Emerald Matt



Fez Emerald Gloss



Fez Aqua Matt





Fez Ocean Gloss



Fez Ocean Matt





Mustard Gloss



White Gloss & Matt





Fez White Matt



Warm Gloss



Warm Matt



Fez Grey Gloss




Grey Gloss & Matt



Graphite Gloss



Fez Graphite Matt

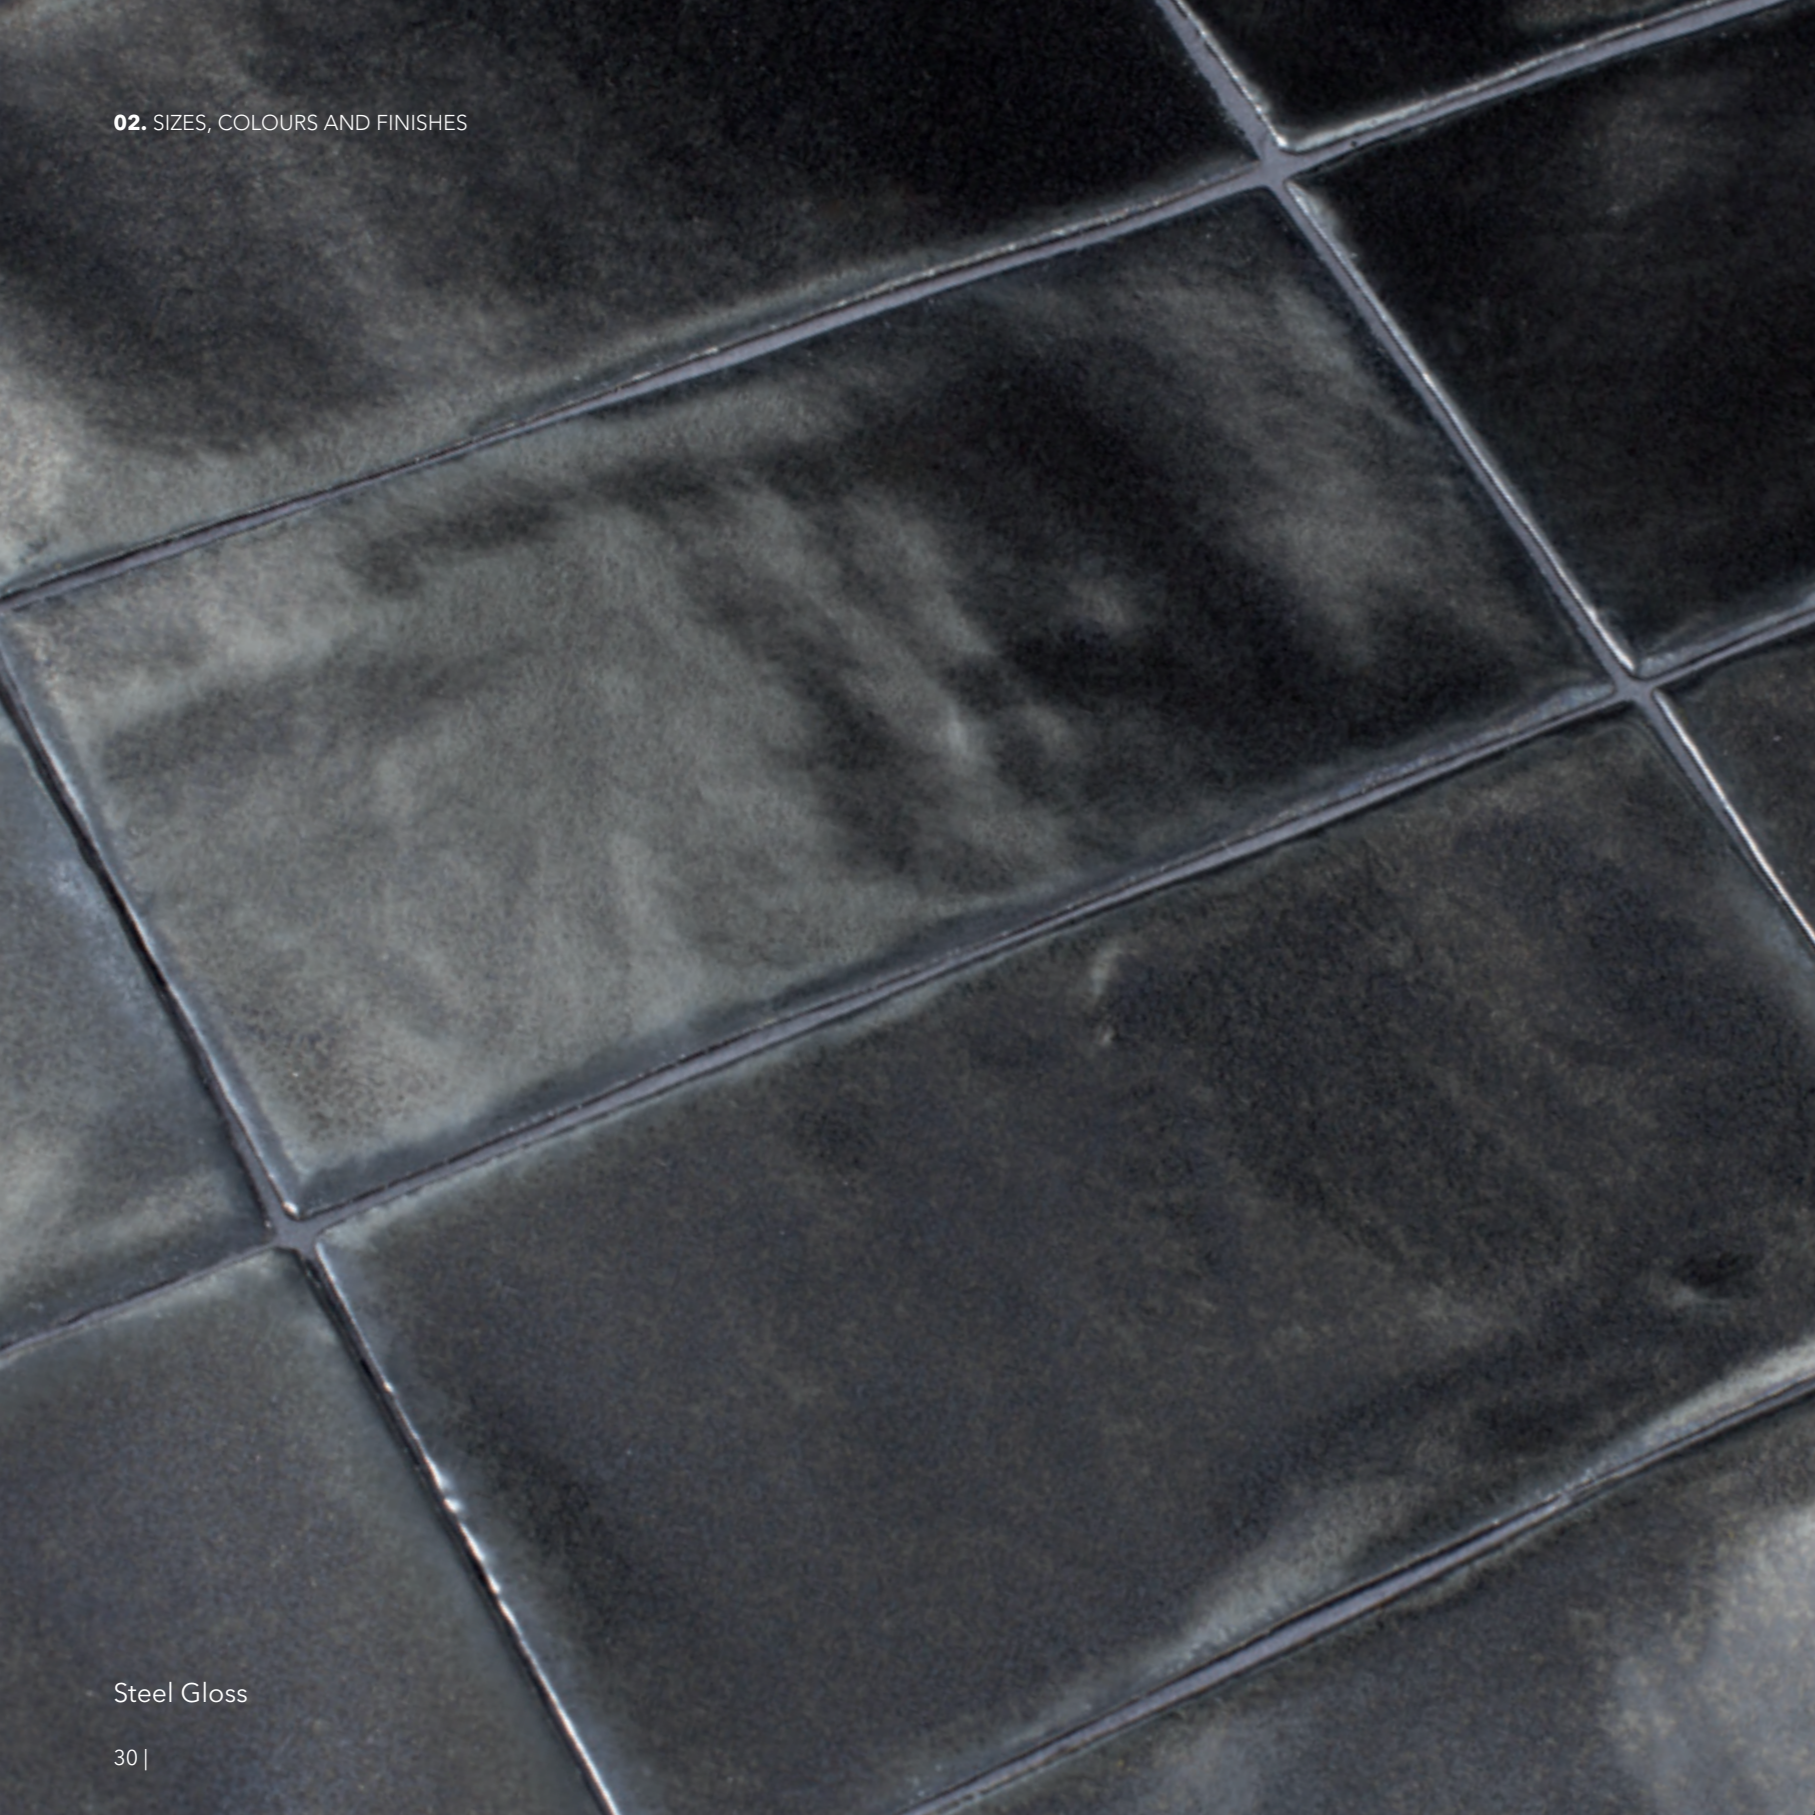

Steel Gloss



Fez Steel Gloss



Fez Copper Gloss



Copper Gloss

03. RECOMMENDATIONS

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore, all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result, we advise to use 1 mm (0.04").

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water. The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder detergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.








STRONG CHROMATIC VARIATION

Fez Collection has been designed with a strong chromatic variation between pieces. Prior to any installation, range of tiles should be checked by the client. No claims will be accepted after installation.


04. TECHNICAL FEATURES



Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)
Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)

FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	62 mm +/- 0,75 mm x 125 mm +/- 0,75 mm	UNE-EN ISO 10545-2:1998
 Water absorption	$E_b > 10\%$	UNE-EN ISO 10545-3:1997
 Modulus of rupture and breaking strength	Thickness $\geq 7,5$ mm mínimo 12 N/mm ² Thickness < 7,5 mm mínimo 15 N/mm ²	UNE-EN ISO 10545-4:2012
 Craze resistance	Pass (Except metallic finishes)	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:1998
 Chemical resistance	GHA (Except metallic finishes)	UNE-EN ISO 10545-13:1998
 Stain resistance	Class 5	UNE-EN ISO 10545-14:1998

FEZ

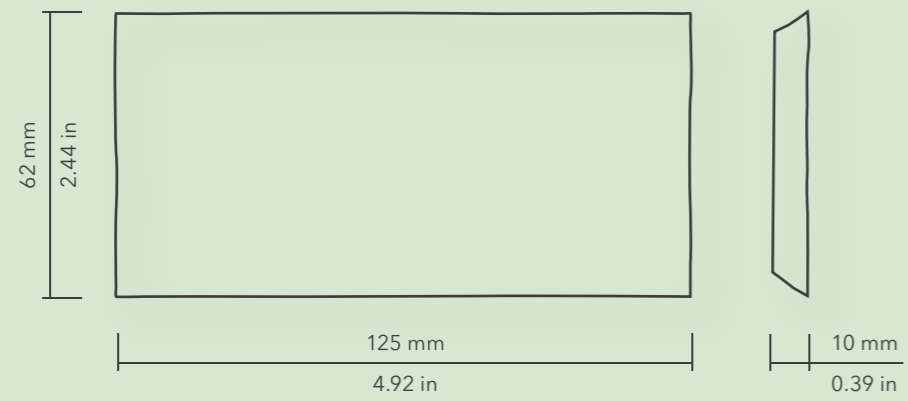

Model	Size (cm)	Pieces/box	kg/box	m ² /box	Box/pallet	m ² /pallet
Fez	6,2x12,5 cm	42	5,59 kg	0,328 m ²	120	39,36 m ²

QUANTUM

TILES. STONE. CORK.

Improving life's spaces.

0800 525 585
hello@qcg.co.nz

Palmerston North Showroom
20 Kaimanawa Street, Kelvin Grove

Auckland Showroom
21 Davis Crescent, Newmarket

[in](#) [@](#) [f](#)

www.qcg.nz

