

Monitor

Featuring QuietBack™

acoufelt
making quiet

Monitor Carpet Tile Product Specifications

| | |
|----------------------|---|
| Description | Multi-level textured loop pile |
| Feature | QuietBack™ |
| Pile Content | 100% solution dyed nylon |
| Pile Treatment | Stain protector & soil repellent |
| Machine Gauge | 1/10 |
| Pile Thickness | 4mm +/- 1mm |
| Total Thickness | 8mm +/- 1mm |
| Primary Backing | 100% non-woven synthetic spunbond |
| Secondary Backing | Eco friendly acoustic felt backing (>85% recycled PET bottles*) |
| Tile Size | 250mm x 1000mm |
| No. of Tiles Per Box | 20 tiles (5.00m ²) |

Performance

| | |
|--------------------------|-----------------------------|
| Traffic Classification | Commercial extra heavy duty |
| Dimensional Stability | BS EN 986, <0.2% KV |
| Electrostatic Propensity | AATCC 134, ≤1.0 KV |
| Light Fastness | ISO 105 B02, min 6 |
| Thermal Resistance | 0.2m ² K/W |

Acoustic Performance

| | |
|----------------------------------|--|
| Sound Absorption ISO 345-2003 | Sound absorption coefficient α _w 0.35 NRC 0.35 (125-4000 Hz) |
|----------------------------------|--|

Flammability

| | |
|-----------------------|----------------------------------|
| Test Method Number | AS/ISO 9239.1-2003 |
| Critical Radiant Flux | Mean result 2.7kW/m ² |
| Smoke Dev Rate | Mean result 160%.min |

Environmental


| | |
|-------------------|----------------------------|
| Pile Fibre | Certified low VOC |
| Secondary Backing | >85% recycled PET content* |

Guarantee

| | |
|--------------------|-----------|
| Wear Warranty | 15 years* |
| Castor Chair Proof | 20 years* |
| Anti-Static | Lifetime* |
| Colourfast | 10 years* |

*conditions apply

Installation Method

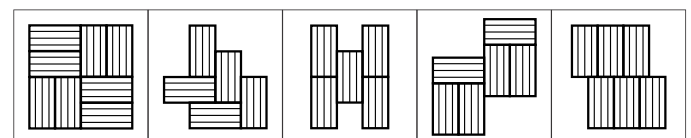

Quarter Turn Herringbone Vertical Plank Half-Lap Horizontal Brick

For further product information visit acoufelt.com

